


KARTA KATALOGOWA

Kratka / żaluzja z regulowanymi lamelami PVC

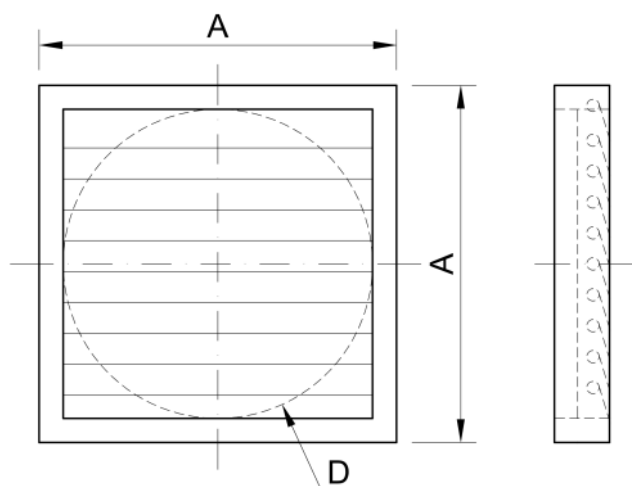

D	Nr kat.	A
mm	---	mm
110	88.110.L.0120	160
125	88.125.L.0120	160
140	88.140.L.0150	194
160	88.160.L.0150	194
180	88.180.L.0200	244
200	88.200.L.0200	244
225	88.225.L.0250	294
250	88.250.L.0250	294
280	88.280.L.0300	347
315	88.315.L.0300	347
355	88.355.L.0350	397
400	88.400.L.0400	462
450	88.450.L.0450	501
500	88.500.L.0500	549
600	88.600.L.0650	696

Strata ciśnienia, $V_{max} = 10 \text{ m/s}$

d110-d200	100 m ³ /h	7-9 Pa
	1100 m ³ /h	60-70 Pa
d225-d315	100 m ³ /h	5 Pa
	1000 m ³ /h	18-28 Pa
d225-d315	2800 m ³ /h	30-60 Pa
	100 m ³ /h	3-5 Pa
	1000 m ³ /h	10-15 Pa
	4500 m ³ /h	20-28 Pa

Oznaczenia w tabeli:

a. D - średnica zewnętrzna rury

Kratka wraz z lamelami wykonana jest z szarego PVC; można ją też wykonać z PVC w kolorze białym

Maksymalna prędkość przepływu 10 m/s